


+1 (917) 909-0405

www.alexallenstudio.com

Chord Convoy (30" + 30")





PRODUCT INFORMATION

Year of Design:

Country of Manufacture:

Brooklyn, NY, USA

Materials:

Steel Tube, and Acrylic

Certifications:

Dry / Damp Location UL Listed (US and Canada) CE Listed (EU)

Warranty:

5 years

Fixture Weight:

16 lbs / 7.3 kg

Shipping Size and Weight:

55"L x 9"W x 29" H 145 cm x 28 cm x 84 cm 40 lbs / 18.1 kg

SPECIFICATIONS

Flexible LED Module (>60,000 Hour Lifespan) Universal Voltage 120V-277V, 50Hz/60Hz

Dimming Options:

TRIAC/ELV or 0-10V*

*See compatible dimmer guide

Standard Brightness:

5052 Lumens, 94 CRI, 48W (IES files available upon request)

LED Temperatures (K):

2200, 2500, 2700, 3000, 3500, 4000, 5000


Cord Length:

120" / 304.8 cm, Field Adjustable

Minimum Drop Length:

30" / 76.2 cm

Note: Numbers / sizes of individual Chord modules are fully customizable



FINISH OPTIONS

Metal and Canopy Finishes:

Brushed Nickel, Polished Nickel, Brushed Brass, Polished Brass, Mottled Brass, Bronze, Blackened Steel, Gunmetal, Satin White

























SPECIFICATION CODE

Fixture	Size	LED Temp	Brightness	Dimming
CON	30		SB	UNV
		22 - 2200K		
		25 - 2500K		
		27 - 2700K		
		30 - 3000K		
		35 - 3500K		
		40 - 4000K		
		50 - 5000K		

DAL D. I. INC. I. I.	BB 0	01 0 1 11 1	DD 0
BN - Brushed Nickel	BR - Bronze	SN - Brushed Nickel	BR - Bronze
PN - Polished Nickel	BS - Blackened Steel	PN - Polished Nickel	BS - Blackened Stee
BB - Brushed Brass	GM - Gunmetal	BB - Brushed Brass	GM - Gunmetal
PB - Polished Brass		PB - Polished Brass	SW - Satin White
MB - Mottled Brass		MB - Mottled Brass	








+1 (917) 909-0405

www.alexallenstudio.com

Chord Convoy (36" + 36")

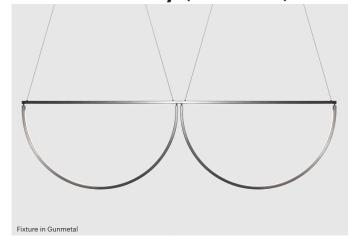



PRODUCT INFORMATION

Year of Design:

2017

Country of Manufacture:

Brooklyn, NY, USA

Materials:

Steel Tube, and Acrylic

Certifications:

Dry / Damp Location UL Listed (US and Canada) CE Listed (EU)

Warranty:

5 years

Fixture Weight:

18 lbs / 8.2 kg

Shipping Size and Weight:

55"L x 9"W x 29" H 145 cm x 28 cm x 84 cm 50 lbs / 22.6 kg

SPECIFICATIONS

LED:

Flexible LED Module (>60,000 Hour Lifespan) Universal Voltage 120V-277V, 50Hz/60Hz

Dimming Options:

TRIAC/ELV or 0-10V*

*See compatible dimmer guide

Standard Brightness:

6062 Lumens, 94 CRI, 58W (IES files available upon request)

LED Temperatures (K):

2200, 2500, 2700, 3000, 3500, 4000, 5000


Cord Length:

120" / 304.8 cm, Field Adjustable

Minimum Drop Length:

30" / 76.2 cm

Note: Numbers / sizes of individual Chord modules are fully customizable



FINISH OPTIONS

Metal and Canopy Finishes:

Brushed Nickel, Polished Nickel, Brushed Brass, Polished Brass, Mottled Brass, Bronze, Blackened Steel, Gunmetal, Satin White



























SPECIFICATION CODE

Fixture	Size	LED Temp	Brightness	Dimming
CON	36		SB	UNV
		22 - 2200K		
		25 - 2500K		
		27 - 2700K		
		30 - 3000K		
		35 - 3500K		
		40 - 4000K		
		50 - 5000K		

ning	Metal Finish		Canopy Finish	
UNV				
	BN - Brushed Nickel	BR - Bronze	SN - Brushed Nickel	BR - Bronze
	PN - Polished Nickel	BS - Blackened Steel	PN - Polished Nickel	BS - Blackened Steel
	BB - Brushed Brass	GM - Gunmetal	BB - Brushed Brass	GM - Gunmetal
	PB - Polished Brass		PB - Polished Brass	SW - Satin White
	MB - Mottled Brass		MB - Mottled Brass	








+1 (917) 909-0405

www.alexallenstudio.com

Chord Convoy (40" + 40")





PRODUCT INFORMATION

Year of Design:

2017

Country of Manufacture:

Brooklyn, NY, USA

Materials:

Steel Tube, and Acrylic

Certifications:

Dry / Damp Location UL Listed (US and Canada) CE Listed (EU)

Warranty:

5 years

Fixture Weight:

20 lbs / 9.1 kg

Shipping Size and Weight:

55"L x 9"W x 29" H 145 cm x 28 cm x 84 cm 60 lbs / 27.2 kg

SPECIFICATIONS

LED:

Flexible LED Module (>60,000 Hour Lifespan) Universal Voltage 120V-277V, 50Hz/60Hz

Dimming Options:

TRIAC/ELV or 0-10V*

*See compatible dimmer guide

Standard Brightness:

6905 Lumens, 84 CRI, 65W (IES files available upon request)

LED Temperatures (K):

2200, 2500, 2700, 3000, 3500, 4000, 5000


Cord Length:

120" / 304.8 cm, Field Adjustable

Minimum Drop Length:

30" / 76.2 cm

Note: Numbers / sizes of individual Chord modules are fully customizable



FINISH OPTIONS

Metal and Canopy Finishes:

Brushed Nickel, Polished Nickel, Brushed Brass, Polished Brass, Mottled Brass, Bronze, Blackened Steel, Gunmetal, Satin White























SPECIFICATION CODE

Fixture	Size	LED Temp	Brightness	Dimming
CON	40		SB	UNV
		22 - 2200K		
		25 - 2500K		
		27 - 2700K		
		30 - 3000K		
		35 - 3500K		
		40 - 4000K		
		50 - 5000K		

Dimming	Metal Finish		Canopy Finish	
UNV				
	BN - Brushed Nickel	BR - Bronze	SN - Brushed Nickel	BR - Bronze
	PN - Polished Nickel	BS - Blackened Steel	PN - Polished Nickel	BS - Blackened Steel
	BB - Brushed Brass	GM - Gunmetal	BB - Brushed Brass	GM - Gunmetal
	PB - Polished Brass		PB - Polished Brass	SW - Satin White
	MB - Mottled Brass		MB - Mottled Brass	
	<u> </u>	BN - Brushed Nickel PN - Polished Nickel BB - Brushed Brass PB - Polished Brass	BN - Brushed Nickel BR - Bronze PN - Polished Nickel BS - Blackened Steel BB - Brushed Brass GM - Gunmetal PB - Polished Brass	BN - Brushed Nickel PN - Polished Nickel BB - Brushed Brass PB - Polished Brass BR - Bronze BR - Brushed Nickel BR - Brushed Brass BR - Brushed Brass PB - Polished Brass PB - Polished Brass








+1 (917) 909-0405

www.alexallenstudio.com

Chord Convoy (48" + 48")





PRODUCT INFORMATION

Year of Design:

2017

Country of Manufacture:

Brooklyn, NY, USA

Materials:

Steel Tube, and Acrylic

Certifications:

Dry / Damp Location UL Listed (US and Canada) CE Listed (EU)

Warranty:

5 years

Fixture Weight:

24 lbs / 10.8 kg

Shipping Size and Weight:

57"L x 11"W x 33" H 145 cm x 28 cm x 84 cm 70 lbs / 31.7 kg

SPECIFICATIONS

LED:

Flexible LED Module (>60,000 Hour Lifespan) Universal Voltage 120V-277V, 50Hz/60Hz

Dimming Options:

TRIAC/ELV or 0-10V*

*See compatible dimmer guide

Standard Brightness:

8252 Lumens, 94 CRI, 78W (IES files available upon request)

LED Temperatures (K):

2200, 2500, 2700, 3000, 3500, 4000, 5000


Cord Length:

120" / 304.8 cm, Field Adjustable

Minimum Drop Length:

30" / 76.2 cm

Note: Numbers / sizes of individual Chord modules are fully customizable

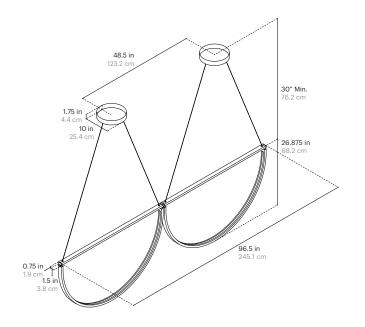

FINISH OPTIONS

Metal and Canopy Finishes:

Brushed Nickel, Polished Nickel, Brushed Brass, Polished Brass, Mottled Brass, Bronze, Blackened Steel, Gunmetal, Satin White

























SPECIFICATION CODE

Fixture	Size	LED Temp	Brightness	Dimming
CON	48		SB	UNV
		22 - 2200K		
		25 - 2500K		
		27 - 2700K		
		30 - 3000K		
		35 - 3500K		
		40 - 4000K		
		50 - 5000K		

BN - Brushed Nickel	BR - Bronze	SN - Brushed Nickel	BR - Bronze
PN - Polished Nickel	BS - Blackened Steel	PN - Polished Nickel	BS - Blackened Steel
BB - Brushed Brass	GM - Gunmetal	BB - Brushed Brass	GM - Gunmetal
PB - Polished Brass		PB - Polished Brass	SW - Satin White
MB - Mottled Brass		MB - Mottled Brass	








+1 (917) 909-0405

www.alexallenstudio.com

Chord Convoy (52" + 52")



Canopy in Brushed Nickel

PRODUCT INFORMATION

Year of Design:

2017

Country of Manufacture:

Brooklyn, NY, USA

Materials:

Steel Tube, and Acrylic

Certifications:

Dry / Damp Location UL Listed (US and Canada) CE Listed (EU)

Warranty:

5 years

Fixture Weight:

30 lbs / 13.6 kg

Shipping Size and Weight:

57"L x 11"W x 33" H 145 cm x 28 cm x 84 cm 80 lbs / 36.2 kg

SPECIFICATIONS

Flexible LED Module (>60,000 Hour Lifespan) Universal Voltage 120V-277V, 50Hz/60Hz

Dimming Options:

TRIAC/ELV or 0-10V*

*See compatible dimmer guide

Standard Brightness:

8925 Lumens, 94 CRI, 85W (IES files available upon request)

LED Temperatures (K):

2200, 2500, 2700, 3000, 3500, 4000, 5000


Cord Length:

120" / 304.8 cm, Field Adjustable

Minimum Drop Length:

30" / 76.2 cm

Note: Numbers / sizes of individual Chord modules are fully customizable

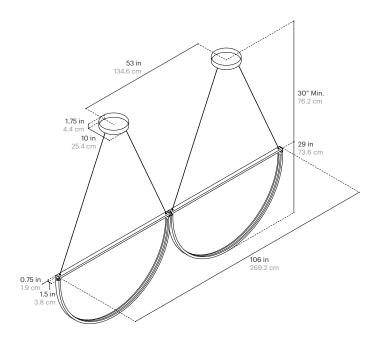

FINISH OPTIONS

Metal and Canopy Finishes:

Brushed Nickel, Polished Nickel, Brushed Brass, Polished Brass, Mottled Brass, Bronze, Blackened Steel, Gunmetal, Satin White



























Fixture	Size	LED Temp	Brightness	Dimming
CON	52		SB	UNV
		22 - 2200K		
		25 - 2500K		
		27 - 2700K		
		30 - 3000K		
		35 - 3500K		
		40 - 4000K		
		50 - 5000K		

Metal Finish		Canopy Finish	
BN - Brushed Nickel	BR - Bronze	SN - Brushed Nickel	BR - Bronze
PN - Polished Nickel	BS - Blackened Steel	PN - Polished Nickel	BS - Blackened Steel
BB - Brushed Brass	GM - Gunmetal	BB - Brushed Brass	GM - Gunmetal
PB - Polished Brass		PB - Polished Brass	SW - Satin White
MB - Mottled Brass		MB - Mottled Brass	







+1 (917) 909-0405

www.alexallenstudio.com

DIMMER COMPATABILITY (L.T.F Dimmable LED Drivers)

,		
LUTRON:	CRESTRON:	(CONTINUED)
CASETA WIRELESS PD-6WCL	CLW-DIMSWEX-P	CLX-1DELV4
DIVA CL DVCL-153P-WH	P-DIMEX	DIN-1DIM4
DIVA ELV DVELV-303P	GLX-DIM6	DIN-1DIMU4
DIVA 0-10V DVSTV	GLXX-2DIM8	CLW-DIMEX-E
DIVA 0-10V DVTV	CLW-DELVEX-E	CLW-DIMEX-P
HOME WORKS HQRD-6A	CLW-DELVEX-P	CLW-DIMSWEX-E
HOME WORKS HQRD-6NA	CLX-2DIMFLV8	LEVITON:
MRF2-6ELV-120-WH	DIN-4DIMFLV4	6615
MAESTRO MRF2-6ELV-120-WH	CLS-EXP-DIMFLV	6672
MAESTRO RF RRA-6D	GLX-DIMFLV8	6674/IPL06
MAESTRO RF RRA-6NA	SELV-300P	IPEO4
MAESTRO RF RRA-6ND	CLS-C6	IPIO6
MAESTRO MAELV-600	CLS-C6M	VP106
MAESTRO MSCELV-600M	CLS-C6EX	VPEO4
MAESTRO CL MACL-153MH	CLS-C6MEX	VPM06
MAESTRO IR MIRELV-600	CLS-C6MRF	VREO4
MAESTRO WIRELESS MRF2-6ELV-120	CLS-C6RF	VRM10
NOVA T NTELV-600-WH	CLS-EXP-DIM	IP710
NOVA NVELV-600-WH	CLS-EXP-DIMU	DS710
NOVA T NTELV-300	CLX-1DIM4	DD710
SKYLARK SELV-600-WH	CLX-1DIM8	55710
SKYLARK CONTOUR CTELV-303P	CLX-2DIM2	FEIT
VIERTI VTELV-600-XXX	CLX-2DIM8	BPMIMSMART/2



