


# 2x4 Plus Pendant Collection

Installation and Product Guide  
36", 48", and 60" Pendants

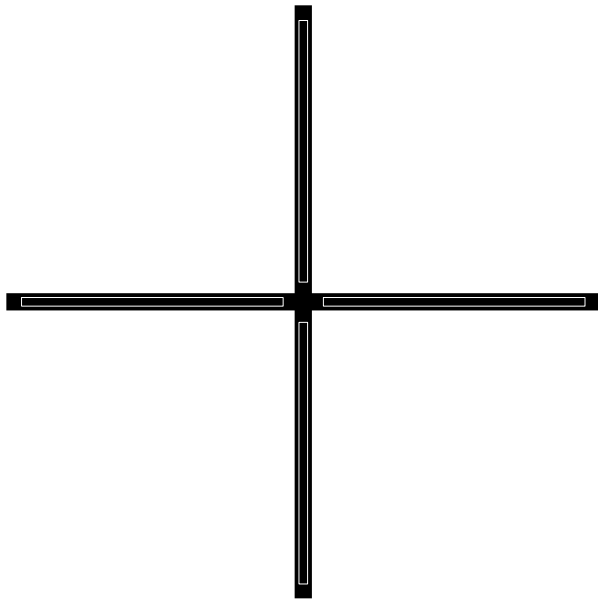

AlexAllen  
Studio


## CAUTION:

Electric shock risk. Turn off electrical power at breaker before beginning installation. We recommend this product be installed by a qualified electrician only.

## INSTALLATION INSTRUCTIONS

- (1) Attach **Ceiling Plate** to ceiling **Junction Box** with junction box screws.
- (2) Unscrew the **Cable Holders** from **Threaded Inserts** on the pendant. Feed one **Suspension Cable** through the base of the **Cable Holder** till it rests on the end stopper. Screw the **Cable Holder** back into the **Threaded Insert**, locking the end stopper in place. Repeat for all Cable Holders. See 'Diagram A' on back of instruction booklet for more detail.
- (3) Feed the four **Suspension Cables** through the holes in the bottom of the **Canopy** and into the **Cable Grippers** in the **Ceiling Plate**. Continue feeding Suspension Cables through the cable grippers until the fixture is level and at the desired height. Trim the end of the cable with approved cable cutters. See 'Diagram B' box '1' on back of instruction booklet for more detail.
- (4) Feed the end of the **Power Cord** into the large center hole in **Canopy** and trim, leaving some extra length to connect to driver. 'Diagram B' box '2' on back of instruction booklet for more detail.
- (5) Connect **Power Cord** electrical wire ends to **LED Driver** output (Red, Blue). Connect the driver input cables to the line voltage input. 24V DC ONLY!  
Red Wire: LED+. Black Wire: LED-.  
Purple Wire: Dim+. Pink Wire: Dim-.
- (6) Slide the **Canopy** up the **Suspension Cables** to the ceiling and secure it using the two **Set Screws**. See Diagram 'A' box '3' on back of instruction booklet for more detail.
- (7) Position **Strain Relief** onto **Power Cord** at the desired length and close with pliers. Push **Strain Relief** into second hole on Feed Side Canopy to finish installation.

## INSTALLATION DIAGRAMS

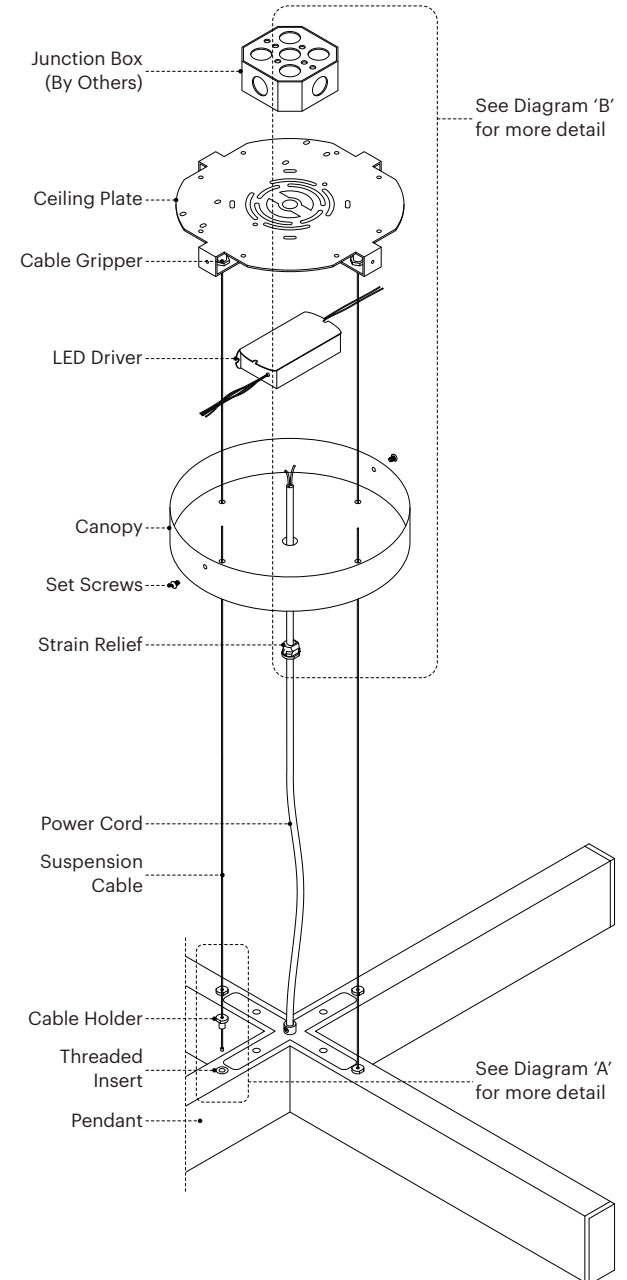

Flexible LED Module (>60,000 Hour Lifespan)  
Universal Voltage 120V-277V, 50Hz/60Hz



## CARE INSTRUCTIONS

For removing oils from metal surfaces after handling, or for removing moisture, grease, or dirt, wipe or rub lightly with a dry microfiber or cotton cloth.

Do not use any abrasive or acidic household cleaning products on product surfaces.

For the best maintenance of the product, protect against sunlight, heat, or any other natural elements.

## DIMMER COMPATIBILITY

### LUTRON:

CASETA WIRELESS PD-6WCL  
DIVA CL DVCL-153P-WH  
DIVA ELV DVELV-303P  
DIVA 0-10V DVSTV  
DIVA 0-10V DVTV  
HOME WORKS HQRD-6A  
HOME WORKS HQRD-6NA  
MRF2-6ELV-120-WH  
MAESTRO MRF2-6ELV-120-WH  
MAESTRO RF RRA-6D  
MAESTRO RF RRA-6NA  
MAESTRO RF RRA-6ND  
MAESTRO MAELV-600  
MAESTRO MSCELV-600M  
MAESTRO CL MAELV-153MH  
MAESTRO IR MIRELV-600  
MAESTRO WIRELESS MRF2-6ELV-120  
NOVA T NTELV-600-WH  
NOVA NVELV-600-WH  
NOVA T NTELV-300  
SKYLARK SELV-600-WH  
SKYLARK CONTOUR CTELV-303P  
VIERTI VTELV-600-XXX

### LEVITON:

6615  
6672  
6674/IPLO6  
IPE04  
IPI06  
VP106  
VPE04  
VPM06  
VRE04  
VRM10  
IP710

### CONT.

DS710  
DD710

### CRESTRON:


CLW-DIMSWEX-P  
P-DIMEX  
GLX-DIM6  
GLXX-2DIM8  
CLW-DELVEX-E  
CLW-DELVEX-P  
CLX-2DIMFLV8  
DIN-4DIMFLV4  
CLS-EXP-DIMFLV  
GLX-DIMFLV8  
SELV-300P  
CLS-C6  
CLS-C6M  
CLS-C6EX  
CLS-C6MEX  
CLS-C6MRF  
CLS-C6RF  
CLS-EXP-DIM  
CLS-EXP-DIMU  
CLX-1DIM4  
CLX-1DIM8  
CLX-2DIM2  
CLX-2DIM8  
CLX-1DELV4  
DIN-1DIM4  
DIN-1DIMU4  
CLW-DIMEX-E  
CLW-DIMEX-P  
CLW-DIMSWEX-E

### FEIT

BPMIMSMART/2

## INSTALLATION DIAGRAMS - CONTINUED


Diagram A



**1:** Feed one Suspension Cable through the base of the Cable Holder till it rests on the end stopper.

**2/3:** Screw the Cable Holder back into the Threaded Insert, locking the end stopper in place.

Diagram B

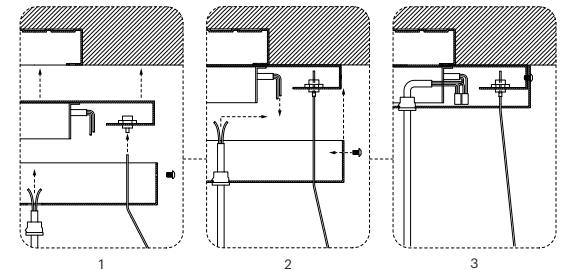

**1:** Attach Ceiling Plate to ceiling Junction Box with junction box screws. Feed the four Suspension Cables through the holes in the bottom of the Canopy and into the Cable Grippers in the Ceiling Plate.

**2:** Feed the end of the Power Cord into the large center hole in Canopy and trim, leaving some extra length to connect to driver.

**3:** Slide the Canopy up the Suspension Cables to the ceiling and secure it using the two Set Screws. Position Strain Relief onto Power Cord at the desired length and close with pliers. Push Strain Relief into second hole on Feed Side Canopy to finish installation.