


AlexAllen Studio

Cane Cluster Collection

Installation and Product Guide
62", 72" Pendants

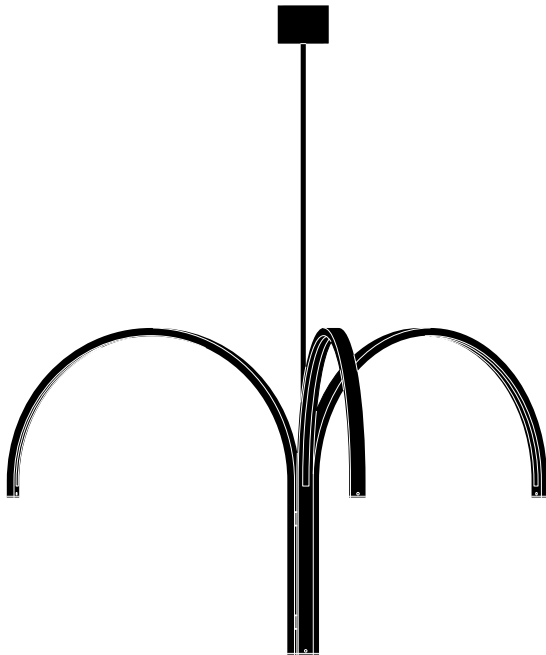

CAUTION:

Electric shock risk. Turn off electrical power at breaker before beginning installation. We recommend this product be installed by a qualified electrician only.

INSTALLATION INSTRUCTIONS

(1) Attach **Ceiling Plate** to ceiling **Junction Box** with junction box screws.

(2) Feed the **Power Cord** into the **Threaded Stem**. Screw the **Threaded Stem** into the **Hang Plate** attached to the fixture.


(3) Slide the **Canopy** down the **Threaded Stem** and leave for the last step.

(4) Push the **Threaded Stem** into the hole at the base of the **Ceiling Plate**. Slide the **Hang Straight Ball** onto the stem and secure in place with the **Hex Nut** provided. See Diagram 'A' box '1' and '2' below for more detail.

(5) Once the stem is secured to the ceiling plate, slide the **LED Driver** into **Ceiling Plate** brackets. Connect the **Power Cord** electrical wire ends to **LED Driver** output (Red, Black). Connect the driver input cables to the line voltage input. Red Wire: LED+. Black Wire: LED-. Purple Wire: Dim+. Pink Wire: Dim-. Black Wire - Line. White Wire - Neutral. Green Wire - Ground

(6) Slide the **Canopy** up the **Threaded Stem** to the ceiling and secure it using the two **Set Screws** provided. See Diagram 'A' box '3' below for more detail.

Diagram A

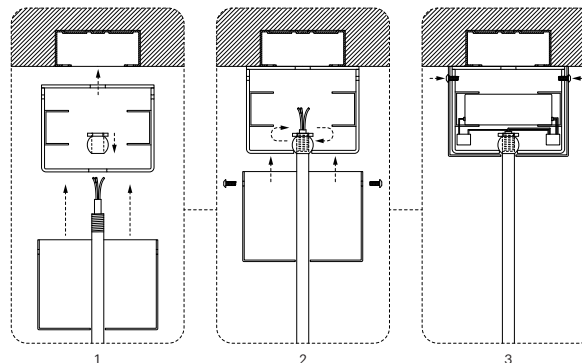


See back of instruction book for installation photographs



Flexible LED Module (>60,000 Hour Lifespan)
Universal Voltage 120V-277V, 50Hz/60Hz



INSTALLATION DIAGRAMS

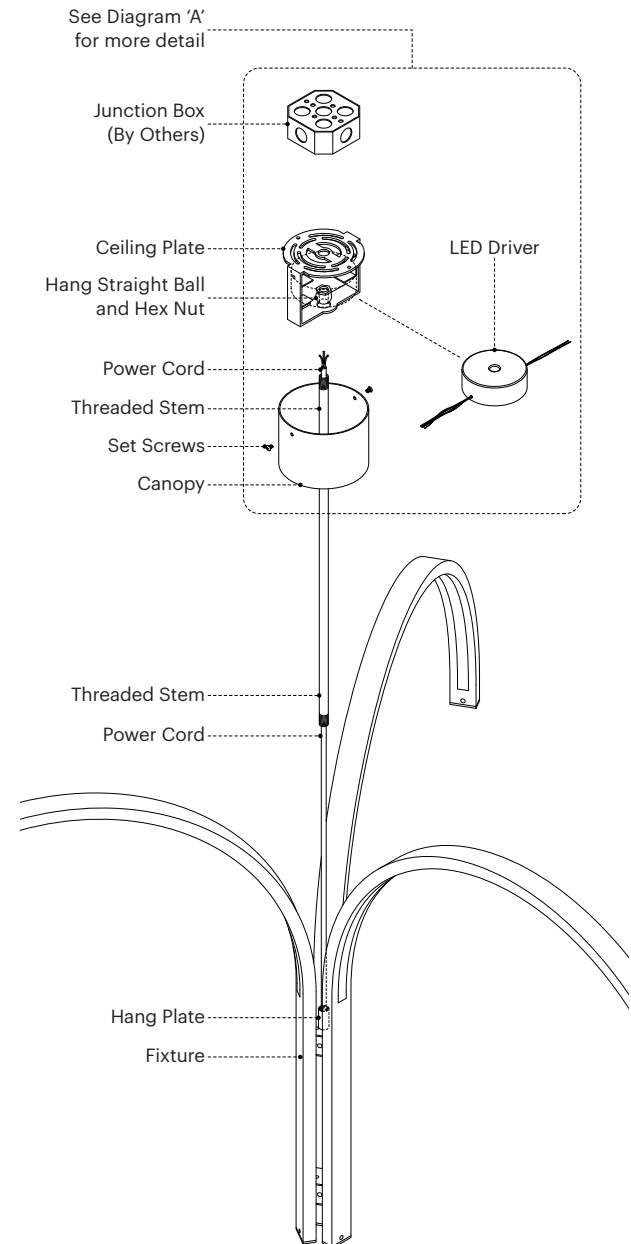

DIMMER COMPATIBILITY

LUTRON:
CASETA WIRELESS PD-6WCL
DIVA CL DVCL-153P-WH
DIVA ELV DVELV-303P
DIVA 0-10V DVSTV
DIVA 0-10V DDTV
HOME WORKS HQRD-6A
HOME WORKS HQRD-6NA
MRF2-6ELV-120-WH
MAESTRO MRF2-6ELV-120-WH
MAESTRO RF RRA-6D
MAESTRO RF RRA-6NA
MAESTRO RF RRA-6ND
MAESTRO MAELV-600
MAESTRO MSCELV-600M
MAESTRO CL MACL-153MH
MAESTRO IR MIRELV-600
MAESTRO WIRELESS MRF2-6ELV-120
NOVA T NTELV-600-WH
NOVA NVELV-600-WH
NOVA T NTELV-300
SKYLARK SELV-600-WH
SKYLARK CONTOUR CTELV-303P
VIERTI VTELV-600-XXX

LEVITON:
6615
6672
6674/IPLO6
IPE04
IPI06
VP106
VPE04
VPM06
VRE04
VRM10
IP710

AlexAllen Studio LLC
T: +1 (917) 909-0405
info@alexallenstudio.com
www.alexallenstudio.com

CONT.
DS710
DD710

CRESTRON:
CLW-DIMSWEX-P
P-DIMEX
GLX-DIM6
GLXX-2DIM8
CLW-DELVEX-E
CLW-DELVEX-P
CLX-2DIMFLV8
DIN-4DIMFLV4
CLS-EXP-DIMFLV
GLX-DIMFLV8
SELV-300P
CLS-C6
CLS-C6M
CLS-C6EX
CLS-C6MEX
CLS-C6MRF
CLS-C6RF
CLS-EXP-DIM
CLS-EXP-DIMU
CLX-1DIM4
CLX-1DIM8
CLX-2DIM2
CLX-2DIM8
CLX-1DELV4
DIN-1DIM4
DIN-1DIMU4
CLW-DIMEX-E
CLW-DIMEX-P
CLW-DIMSWEX-E

FEIT
BPMIMSMART/2

Version: July 1, 2025

INSTALLATION PHOTOGRAPHS



(1) After installing the **Ceiling Plate** and feeding the **Power Cord** into the **Threaded Stem** push the **Threaded Stem** into the hole at the base of the **Ceiling Plate**. Slide the **Hang Straight Ball** onto the stem and secure in place with the **Hex Nut** provided.



(2) Once the stem is secured to the ceiling plate, slide the **LED Driver** into **Ceiling Plate** brackets. Connect the **Power Cord** electrical wire ends to **LED Driver** output (Red, Black). Connect the driver input cables to the line voltage input.

INSTALLATION PHOTOGRAPHS



(3) After connecting wires, slide the **Canopy** up the **Threaded Stem** to the ceiling and secure it using the two **Set Screws** provided.

CARE INSTRUCTIONS

For removing oils from metal surfaces after handling, or for removing moisture, grease, or dirt, wipe or rub lightly with a dry microfiber or cotton cloth.

Do not use any abrasive or acidic household cleaning products on product surfaces.

For the best maintenance of the product, protect against sunlight, heat, or any other natural elements.