

**AlexAllen**  
Studio

AlexAllen Studio LLC  
302 3rd Avenue  
Brooklyn, NY 11215


+1 (917) 909-0405

www.alexallenstudio.com

# 2x4 Plus Pendant (36")



Fixture in Whitewashed, Brushed Brass Hardware

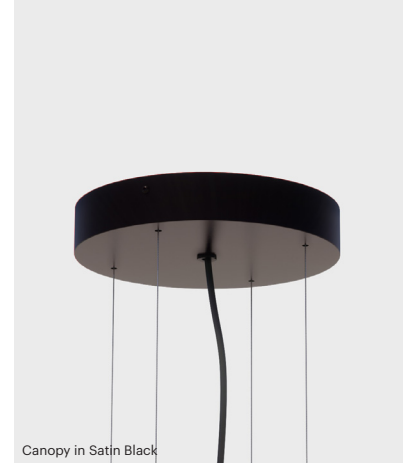

Canopy in Satin Black

## PRODUCT INFORMATION

### Year of Design:

2015

### Country of Manufacture:

Brooklyn, NY, USA

### Materials:

Sustainably Harvested Eastern White Pine,  
Steel, Brass, Aluminum, and Acrylic

### Certifications:

Dry / Damp Location  
UL Listed (US and Canada)  
CE Listed (EU)

### Warranty:

5 years

### Fixture Weight:

7.5 lbs / 3.5 kg

### Shipping Size and Weight:

32"L x 32"W x 8" H  
81 cm x 81 cm x 20 cm  
40 lbs / 18.1 kg

## SPECIFICATIONS

### LED:

Flexible LED Module (>60,000 Hour Lifespan)  
Universal Voltage 120V-277V, 50Hz/60Hz

### Dimming Options:

TRIAC/ELV or 0-10V\*  
\*See compatible dimmer guide

### Standard Brightness:

2020 Lumens (3000K), 94 CRI, 19W  
(IES files available upon request)

### High Brightness:

2885 Lumens (3000K), 94 CRI, 26W  
(IES files available upon request)

### LED Temperatures (K):


2200, 2500, 2700, 3000, 3500, 4000, 5000

### Cord Length:

120" / 304.8 cm, Field Adjustable

### Minimum Drop Length:


12" / 30.48 cm

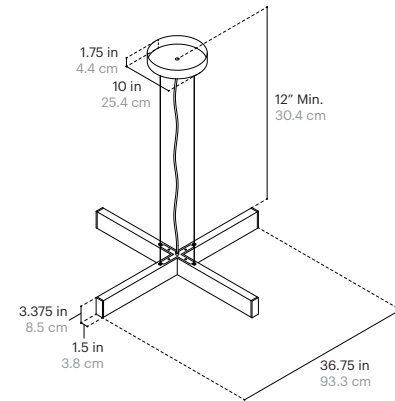

## FINISH OPTIONS

### Wood Finishes:

Natural, Whitewashed, Black Dye



### Endcap Finishes:

Blackened Steel, Brushed Steel, Brushed Brass, Satin White



### Canopy Colors:

Satin Black, Satin White (Powder Coated)



### Cord Colors:

Black, White



## SPECIFICATION CODE

Fixture	Size	LED Temp	Brightness	Dimming
<b>2X4PP</b>	<b>36</b>			<b>UNV</b>
		22 - 2200K	<b>SB</b> - Standard Brightness	
		25 - 2500K	<b>HB</b> - High Brightness	
		27 - 2700K		
		30 - 3000K		
		35 - 3500K		
		40 - 4000K		
		50 - 5000K		

## FINISH CODE


Wood	Endcaps	Canopy	Cord
<b>NA</b> - Natural	<b>NO</b> - No Endcaps	<b>SB</b> - Satin Black	<b>BK</b> - Black
<b>WW</b> - Whitewashed	<b>BL</b> - Blackened Steel	<b>SW</b> - Satin White	<b>WH</b> - White
<b>BD</b> - Black Dye	<b>BS</b> - Brushed Steel		
	<b>BB</b> - Brushed Brass		
	<b>SW</b> - Satin White		



All products and specifications are subject to change without notice. For custom requests email: [info@alexallenstudio.com](mailto:info@alexallenstudio.com)

Version: January 22, 2024





**AlexAllen**  
Studio

AlexAllen Studio LLC  
302 3rd Avenue  
Brooklyn, NY 11215

+1 (917) 909-0405

www.alexallenstudio.com

# 2x4 Plus Pendant (48")



Fixture in Black Dye, Blackened Steel Hardware



Canopy in Satin Black

## PRODUCT INFORMATION

### Year of Design:

2015

### Country of Manufacture:

Brooklyn, NY, USA

### Materials:

Sustainably Harvested Eastern White Pine,  
Steel, Brass, Aluminum, and Acrylic

### Certifications:

Dry / Damp Location  
UL Listed (US and Canada)  
CE Listed (EU)

### Warranty:

5 years

### Fixture Weight:

10lbs / 4.5kg

### Shipping Size and Weight:

42"L x 42"W x 8" H  
106 cm x 106 cm x 20 cm  
70lbs / 31.7 kg

## SPECIFICATIONS

### LED:

Flexible LED Module (>60,000 Hour Lifespan)  
Universal Voltage 120V-277V, 50Hz/60Hz

### Dimming Options:

TRIAC/ELV or 0-10V\*  
\*See compatible dimmer guide

### Standard Brightness:

3030 Lumens (3000K), 94 CRI, 28W  
(IES files available upon request)

### High Brightness:

4328 Lumens (3000K), 94 CRI, 40W  
(IES files available upon request)

### LED Temperatures (K):


2200, 2500, 2700, 3000, 3500, 4000, 5000

### Cord Length:

120" / 304.8 cm, Field Adjustable

### Minimum Drop Length:


12" / 30.48 cm

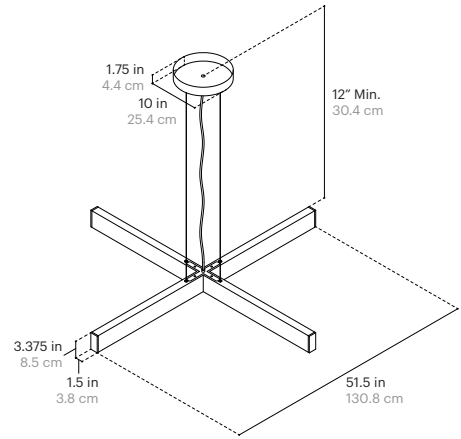

## FINISH OPTIONS

### Wood Finishes:

Natural, Whitewashed, Black Dye



### Endcap Finishes:

Blackened Steel, Brushed Steel, Brushed Brass, Satin White



### Canopy Colors:

Satin Black, Satin White (Powder Coated)



### Cord Colors:

Black, White



## SPECIFICATION CODE

Fixture	Size	LED Temp	Brightness	Dimming
<b>2X4PP</b>	<b>48</b>			<b>UNV</b>
		22 - 2200K	<b>SB</b> - Standard Brightness	
		25 - 2500K	<b>HB</b> - High Brightness	
		27 - 2700K		
		30 - 3000K		
		35 - 3500K		
		40 - 4000K		
		50 - 5000K		

## FINISH CODE


Wood	Endcaps	Canopy	Cord
<b>NA</b> - Natural	<b>NO</b> - No Endcaps	<b>SB</b> - Satin Black	<b>BK</b> - Black
<b>WW</b> - Whitewashed	<b>BL</b> - Blackened Steel	<b>SW</b> - Satin White	<b>WH</b> - White
<b>BD</b> - Black Dye	<b>BS</b> - Brushed Steel		
	<b>BB</b> - Brushed Brass		
	<b>SW</b> - Satin White		



All products and specifications are subject to change without notice. For custom requests email: [info@alexallenstudio.com](mailto:info@alexallenstudio.com)

Version: January 22, 2024





**AlexAllen**  
Studio

AlexAllen Studio LLC  
302 3rd Avenue  
Brooklyn, NY 11215


+1 (917) 909-0405

www.alexallenstudio.com

# 2x4 Plus Pendant (60")



Fixture in Natural Wood, Brushed Steel Hardware

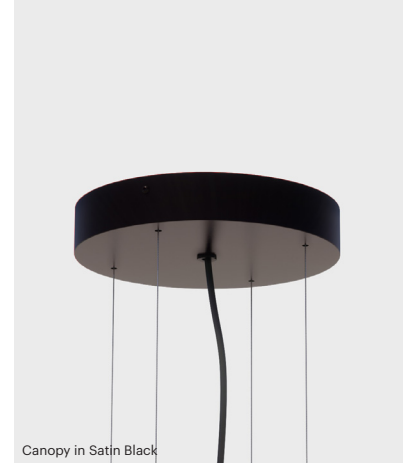

Canopy in Satin Black

## PRODUCT INFORMATION

### Year of Design:

2015

### Country of Manufacture:

Brooklyn, NY, USA

### Materials:

Sustainably Harvested Eastern White Pine,  
Steel, Brass, Aluminum, and Acrylic

### Certifications:

Dry / Damp Location  
UL Listed (US and Canada)  
CE Listed (EU)

### Warranty:

5 years

### Fixture Weight:

12.5 lbs / 5.5kg

### Shipping Size and Weight:

49"L x 49"W x 8" H  
124 cm x 124 cm x 20 cm  
90 lbs / 40.8 kg

## SPECIFICATIONS

### LED:

Flexible LED Module (>60,000 Hour Lifespan)  
Universal Voltage 120V-277V, 50Hz/60Hz

### Dimming Options:

TRIAC/ELV or 0-10V\*  
\*See compatible dimmer guide

### Standard Brightness:

3705 Lumens (3000K), 94 CRI, 35W  
(IES files available upon request)

### High Brightness:

5288 Lumens (3000K), 94 CRI, 48W  
(IES files available upon request)

### LED Temperatures (K):


2200, 2500, 2700, 3000, 3500, 4000, 5000

### Cord Length:

120" / 304.8 cm, Field Adjustable

### Minimum Drop Length:


12" / 30.48 cm

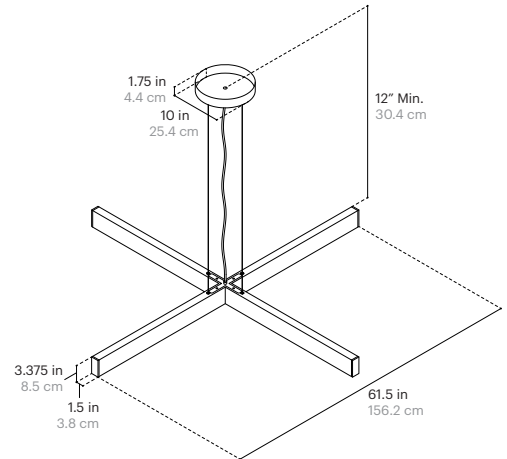

## FINISH OPTIONS

### Wood Finishes:

Natural, Whitewashed, Black Dye



### Endcap Finishes:

Blackened Steel, Brushed Steel, Brushed Brass, Satin White



### Canopy Colors:

Satin Black, Satin White (Powder Coated)



### Cord Colors:

Black, White



## SPECIFICATION CODE

Fixture	Size	LED Temp	Brightness	Dimming
<b>2X4PP</b>	<b>60</b>			<b>UNV</b>
		22 - 2200K	<b>SB</b> - Standard Brightness	
		25 - 2500K	<b>HB</b> - High Brightness	
		27 - 2700K		
		30 - 3000K		
		35 - 3500K		
		40 - 4000K		
		50 - 5000K		

## FINISH CODE


Wood	Endcaps	Canopy	Cord
<b>NA</b> - Natural	<b>NO</b> - No Endcaps	<b>SB</b> - Satin Black	<b>BK</b> - Black
<b>WW</b> - Whitewashed	<b>BL</b> - Blackened Steel	<b>SW</b> - Satin White	<b>WH</b> - White
<b>BD</b> - Black Dye	<b>BS</b> - Brushed Steel		
	<b>BB</b> - Brushed Brass		
	<b>SW</b> - Satin White		



All products and specifications are subject to change without notice. For custom requests email: [info@alexallenstudio.com](mailto:info@alexallenstudio.com)

Version: January 22, 2024





# AlexAllen Studio

AlexAllen Studio LLC  
302 3rd Avenue  
Brooklyn, NY 11215

+1 (917) 909-0405

[www.alexallenstudio.com](http://www.alexallenstudio.com)

---

## DIMMER COMPATABILITY (L.T.F Dimmable LED Drivers)

### LUTRON:

CASETA WIRELESS PD-6WCL  
DIVA CL DVCL-153P-WH  
DIVA ELV DVELV-303P  
DIVA 0-10V DVSTV  
DIVA 0-10V DVTV  
HOME WORKS HQRD-6A  
HOME WORKS HQRD-6NA  
MRF2-6ELV-120-WH  
MAESTRO MRF2-6ELV-120-WH  
MAESTRO RF RRA-6D  
MAESTRO RF RRA-6NA  
MAESTRO RF RRA-6ND  
MAESTRO MAELV-600  
MAESTRO MSCELV-600M  
MAESTRO CL MAELV-153MH  
MAESTRO IR MIRELV-600  
MAESTRO WIRELESS MRF2-6ELV-120  
NOVA T NTELV-600-WH  
NOVA NVELV-600-WH  
NOVA T NTELV-300  
SKYLARK SELV-600-WH  
SKYLARK CONTOUR CTELV-303P  
VIERTI VTELV-600-XXX

### CRESTRON:

CLW-DIMSWEX-P  
P-DIMEX  
GLX-DIM6  
GLXX-2DIM8  
CLW-DELVEX-E  
CLW-DELVEX-P  
CLX-2DIMFLV8  
DIN-4DIMFLV4  
CLS-EXP-DIMFLV  
GLX-DIMFLV8  
SELV-300P  
CLS-C6  
CLS-C6M  
CLS-C6EX  
CLS-C6MEX  
CLS-C6MRF  
CLS-C6RF  
CLS-EXP-DIM  
CLS-EXP-DIMU  
CLX-1DIM4  
CLX-1DIM8  
CLX-2DIM2  
CLX-2DIM8

### (CONTINUED)

CLX-1DELV4  
DIN-1DIM4  
DIN-1DIMU4  
CLW-DIMEX-E  
CLW-DIMEX-P  
CLW-DIMSWEX-E

### LEVITON:

6615  
6672  
6674/IPL06  
IPE04  
IPI06  
VP106  
VPE04  
VPM06  
VRE04  
VRM10  
IP710  
DS710  
DD710

### FEIT

BPMIMSMART/2

