

**AlexAllen**  
Studio

## Bundle Pendant Collection

Installation and Product Guide  
Bundle x 3 and Bundle x 6 Pendants





### CAUTION:

Electric shock risk. Turn off electrical power at breaker before beginning installation. We recommend this product be installed by a qualified electrician only.

### STANDARD INSTALLATION INSTRUCTIONS

- (1) Attach **Crossbar + Cable Gripper** to ceiling **Junction Box** with junction box screws.
- (2) Slide the **Metal Bushing** and **Canopy** (through the center hole) onto the **Suspension Cable**.
- (3) Feed the end of the **Suspension Cable** into the **Cable Gripper** while compressing the spring. Pull cable to the desired length and trim the excess cable with approved cable cutters.
- (4) Feed the end of the **Power Cord** into the second hole in the **Feed Side Canopy** and trim, leaving some extra length.
- (5) Connect **Power Cord** electrical wire ends to **LED Driver** output (Red, Blue). Connect the driver input cables to the line voltage input. 24V DC ONLY!  
Red Wire: LED+. Black Wire: LED-.  
Purple Wire: Dim+. Pink Wire: Dim-.  
Black Wire - Line. White Wire - Neutral. Green Wire - Ground
- (6) Slide the **Canopy** and **Metal Bushing** up the suspension cable and hold tight to the ceiling while threading the **Metal Bushing** onto the **Cable Gripper**, securing the canopy in place. See 'Diagram A' for more detail.
- (7) Position **Strain Relief** onto **Power Cord** at the desired length and close with pliers. Push **Strain Relief** into the hole in the **Canopy** to finish installation.

### STANDARD INSTALLATION DIAGRAMS

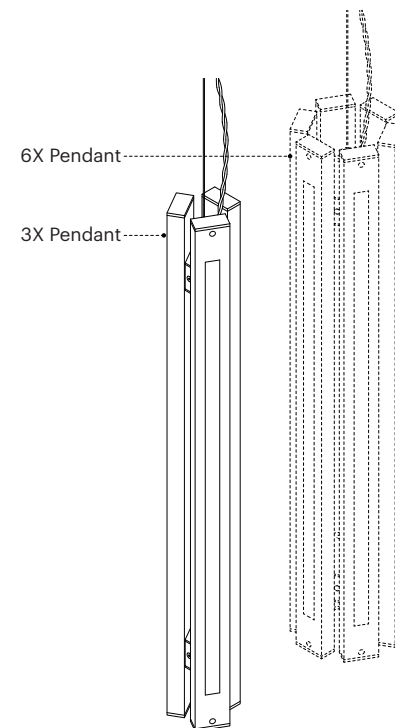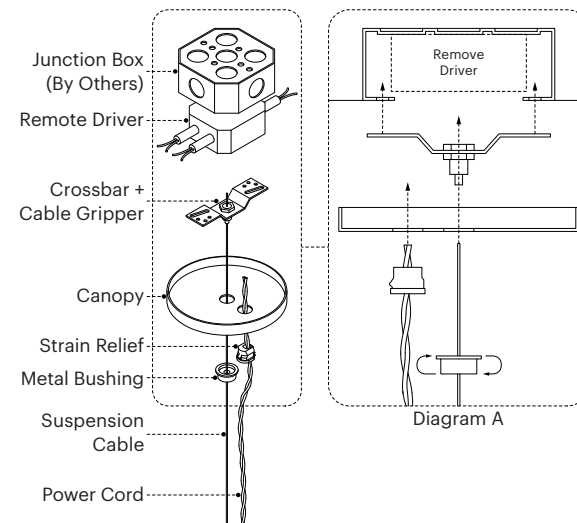

Flexible LED Module (>60,000 Hour Lifespan)  
Universal Voltage 120V-277V, 50Hz/60Hz



CARE INSTRUCTIONS

For removing oils from metal surfaces after handling, or for removing moisture, grease, or dirt, wipe or rub lightly with a dry microfiber or cotton cloth.

Do not use any abrasive or acidic household cleaning products on product surfaces.

For the best maintenance of the product, protect against sunlight, heat, or any other natural elements.

DIMMER COMPATIBILITY

LUTRON:

CASETA WIRELESS PD-6WCL  
DIVA CL DVCL-153P-WH  
DIVA ELV DVELV-303P  
DIVA 0-10V DVSTV  
DIVA 0-10V DVTV  
HOME WORKS HQRD-6A  
HOME WORKS HQRD-6NA  
MRF2-6ELV-120-WH  
MAESTRO MRF2-6ELV-120-WH  
MAESTRO RF RRA-6D  
MAESTRO RF RRA-6NA  
MAESTRO RF RRA-6ND  
MAESTRO MAELV-600  
MAESTRO MSCELV-600M  
MAESTRO CL MACL-153MH  
MAESTRO IR MIRELV-600  
MAESTRO WIRELESS MRF2-6ELV-120  
NOVA T NTELV-600-WH  
NOVA NVELV-600-WH  
NOVA T NTELV-300  
SKYLARK SELV-600-WH  
SKYLARK CONTOUR CTELV-303P  
VIERTI VTELV-600-XXX

LEVITON:

6615  
6672  
6674/IPLO6  
IPE04  
IPI06  
VP106  
VPE04  
VPM06  
VRE04  
VRM10  
IP710

CONT.

DS710  
DD710

CRESTRON:

CLW-DIMSWEX-P  
P-DIMEX  
GLX-DIM6  
GLXX-2DIM8  
CLW-DELVEX-E  
CLW-DELVEX-P  
CLX-2DIMFLV8  
DIN-4DIMFLV4  
CLS-EXP-DIMFLV  
GLX-DIMFLV8  
SELV-300P  
CLS-C6  
CLS-C6M  
CLS-C6EX  
CLS-C6MEX  
CLS-C6MRF  
CLS-C6RF  
CLS-EXP-DIM  
CLS-EXP-DIMU  
CLX-1DIM4  
CLX-1DIM8  
CLX-2DIM2  
CLX-2DIM8  
CLX-1DELV4  
DIN-1DIM4  
DIN-1DIMU4  
CLW-DIMEX-E  
CLW-DIMEX-P  
CLW-DIMSWEX-E

FEIT

BPMIMSMART/2