


AlexAllen Studio

2x4 Pendant Collection 2x4 Leather Collection

Installation and Product Guide
4', 6', 8', 10', and 12' Pendants

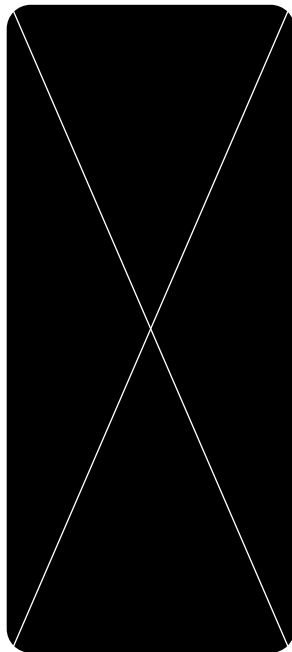

CAUTION:

Electric shock risk. Turn off electrical power at breaker before beginning installation. We recommend this product be installed by a qualified electrician only.

STANDARD INSTALLATION INSTRUCTIONS


- (1) Attach first **Crossbar + Cable Gripper** to ceiling **Junction Box** with junction box screws.
- (2) Attach second **Crossbar + Cable Gripper** to ceiling. Spacing between canopies varies depending on fixture length. See diagram on back of instruction booklet for mounting distances.
- (3) Unscrew the **Cable Holder** from **Threaded Insert** on the pendant. Feed one **Suspension Cable** through the base of the **Cable Holder** till it rests on the end stopper. Screw the **Cable Holder** back into the **Threaded Insert**, locking the end stopper in place. See 'Diagram A' for more detail.
- (4) Slide the **Metal Bushing** and **Feed Side Canopy** (through the center hole) onto the **Suspension Cable**.
- (5) Feed the end of the **Suspension Cable** into the **Cable Gripper** while compressing the spring. Pull cable to the desired length and ensure the light is level. Trim the end of the cable with approved cable cutters. Repeat steps 3 to 5 on Non Feed Side Canopy.
- (6) Feed the end of the **Power Cord** into the second hole in the **Feed Side Canopy** and trim, leaving some extra length. Connect electrical wire ends in **Junction Box**.
120V-277V, 50Hz/60Hz ONLY!
Black Wire - Line. White Wire - Neutral. Green Wire - Ground
- (7) Slide **Feed Side Canopy** and **Metal Bushing** up the suspension cable and hold tight to the ceiling while threading the **Metal Bushing** onto the **Cable Gripper**, securing the canopy in place. See 'Diagram B' for more detail.
- (8) Position **Strain Relief** onto **Power Cord** at the desired length and close with pliers. Push **Strain Relief** into second hole on Feed Side Canopy to finish installation.




Flexible LED Module (>60,000 Hour Lifespan)
Universal Voltage 120V-277V, 50Hz/60Hz



STANDARD INSTALLATION DIAGRAMS

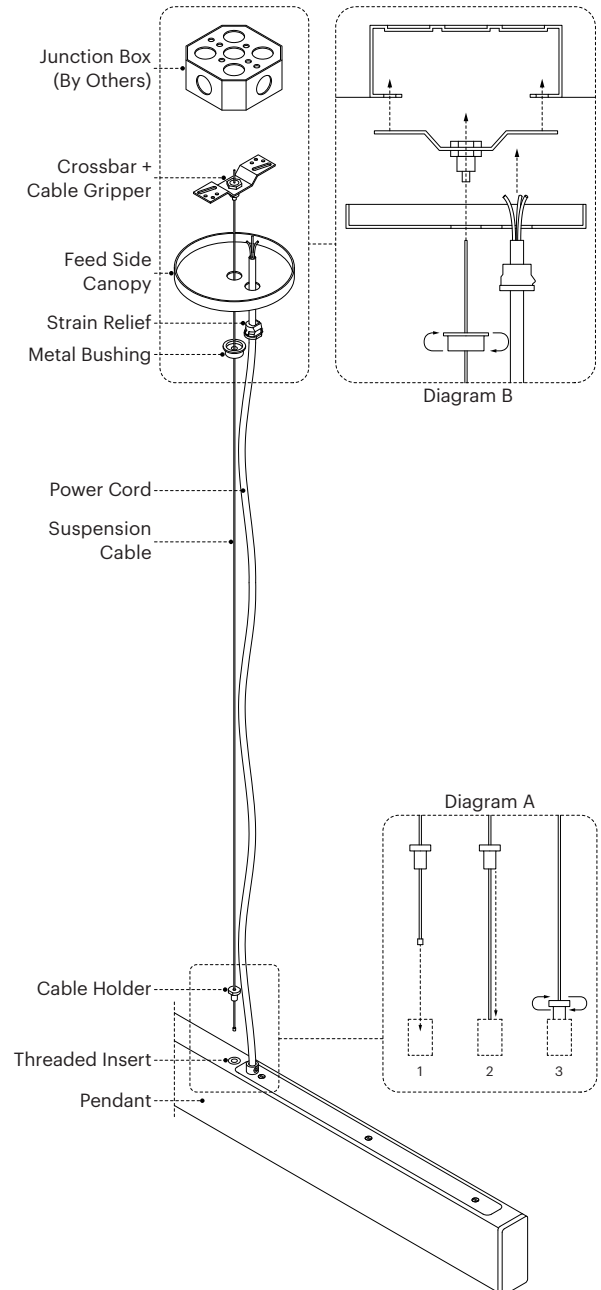

CANOPY MOUNTING DISTANCE

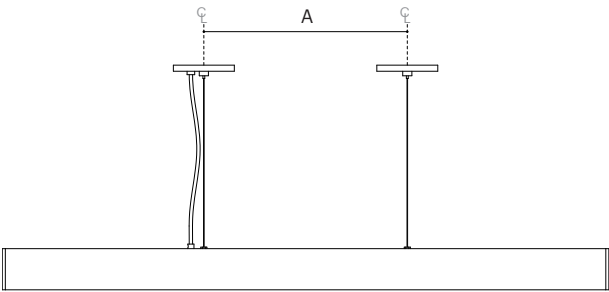

Fixture Length	Distance 'A'
4' Pendant	A = 16 in / 40.6 cm
6' Pendant	A = 38.125 in / 96.8 cm
8' Pendant	A = 62.75 in / 159.3 cm
10' Pendant	A = 85 in / 215.9 cm
12' Pendant	A = 109.625 in / 278.4 cm

CARE INSTRUCTIONS

For removing oils from metal surfaces after handling, or for removing moisture, grease, or dirt, wipe or rub lightly with a dry microfiber or cotton cloth.

Do not use any abrasive or acidic household cleaning products on product surfaces.

For the best maintenance of the product, protect against sunlight, heat, or any other natural elements.

DIMMER COMPATIBILITY

- LUTRON:**
CASETA WIRELESS PD-6WCL
DIVA CL DVCL-153P-WH
DIVA ELV DVELV-303P
DIVA 0-10V DVSTV
DIVA 0-10V DVTV
HOME WORKS HQRD-6A
HOME WORKS HQRD-6NA
MRF2-6ELV-120-WH
MAESTRO MRF2-6ELV-120-WH
MAESTRO RF RRA-6D
MAESTRO RF RRA-6NA
MAESTRO RF RRA-6ND
MAESTRO MAELV-600
MAESTRO MSCELV-600M
MAESTRO CL MACL-153MH
MAESTRO IR MIRELV-600
MAESTRO WIRELESS MRF2-6ELV-120
NOVA T NTELV-600-WH
NOVA NVELV-600-WH
NOVA T NTELV-300
SKYLARK SELV-600-WH
SKYLARK CONTOUR CTELV-303P
VIERTI VTELV-600-XXX

- LEVITON:**
6615
6672
6674/IPLO6
IPE04
IPI06
VP106
VPE04
VPM06
VRE04
VRM10
IP710

- CONT.**
DS710
DD710

- CRESTRON:**
CLW-DIMSWEX-P
P-DIMEX
GLX-DIM6
GLXX-2DIM8
CLW-DELVEX-E
CLW-DELVEX-P
CLX-2DIMFLV8
DIN-4DIMFLV4
CLS-EXP-DIMFLV
GLX-DIMFLV8
SELV-300P
CLS-C6
CLS-C6M
CLS-C6EX
CLS-C6MEX
CLS-C6MRF
CLS-C6RF
CLS-EXP-DIM
CLS-EXP-DIMU
CLX-1DIM4
CLX-1DIM8
CLX-2DIM2
CLX-2DIM8
CLX-1DELV4
DIN-1DIM4
DIN-1DIMU4
CLW-DIMEX-E
CLW-DIMEX-P
CLW-DIMSWEX-E

- FEIT**
BPMIMSMART/2

REMOTE DRIVER INSTALL INSTRUCTIONS

(10' and 12' High Brightness Lengths Only)

- (1) Install **Remote Driver** in **Junction Box** and connect to building power. 24V DC ONLY!
Red Wire: LED+. Blue Wire: LED-.
Purple Wire: Dim+. Pink Wire: Dim-.
- (2) Follow standard installation steps 1-8 (see on opposite page) for the rest of installation. See 'Diagram C' below for more detail.

REMOTE DRIVER INSTALL DIAGRAMS

